

AMAV Micro20 series speakers & Macro80P subwoofer



Combining **superb sonic** performance
with striking **contemporary** aesthetic design



Micro20 Speakers

The AMAV Micro20 is a small but extremely high quality die-cast aluminium, two way speaker. Featuring a 3" woofer and a 1/2" tweeter, the Micro20 delivers extremely high quality audio from a small, robust enclosure. The Micro20 is rated at 30 Watts (RMS) and offers an elegantly styled and great sounding speaker for applications where architectural and aesthetic considerations are paramount. Available in black or white and supplied in pairs with ceiling mounting brackets.



Macro80P Powered Sub Woofer



The Macro80P is the perfect partner for the Micro20 speakers. A dual 6.5" band pass sub that is both compact and punchy, the Macro80P boasts an on-board 80 Watt D Class power amplifier and four 25 Watt amplifiers to power the Micro20's. The Macro80P is available in either black or white and features stereo RCA inputs, stereo XLR inputs and thru outputs, stereo/mono mode switching for the satellite amplifiers, individual level controls for each satellite amplifier and a master volume control.

The Macro80P can also act as a complete small system controller with the addition of the MicroWMVC wall mount volume control. This allows for remote wall mounted master volume, treble and bass control, all mounted on a Clipsal 2000 wall plate and connected via CAT5 cable. The MicroWMVC is available in white.



Micro Pack

The Micro20 Macro80P series is also available as the Micro Pack, complete with four Micro20 speakers, one Macro80P sub, one MicroWMVC wall panel and four 15m speaker cables, all in one convenient package.

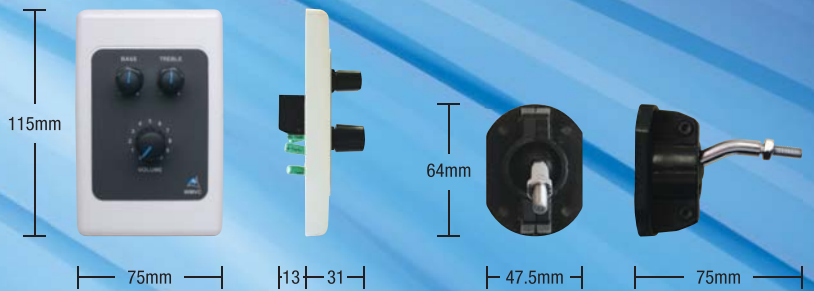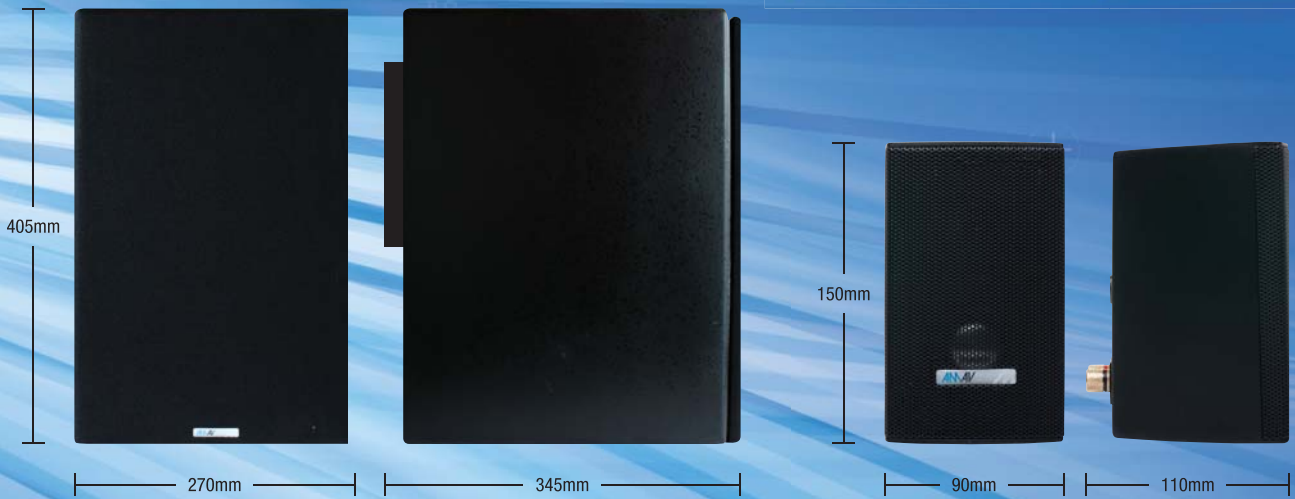

Architectural Specifications

Micro20

Woofer	Diameter	75mm
Tweeter	Diameter	25mm
Impedance		8 ohm
Power	RMS	30W
	Program	60W
	Peak	120W
Sensitivity (1W/1m)		84dB
Frequency Response (+/-3dB)		140Hz-30kHz
Dispersion (h x v)		120° x 90°
Dimensions (h x w x d)		150mm x 90mm x 110mm
Shipping Dimensions (pair) (h x w x d)		190mm x 360mm x 137mm
Shipping Weight		4.7kg



Macro80P

Woofer	Diameter	160mm
Power	RMS	40W
	Program	80W
	Peak	160W
Sensitivity (1W/1m)		90dB
Frequency Response (±3dB)		39Hz-190Hz
Sub Power Output	4 ohms, 1% THD, RMS	70W
Satellite Power Output	8 ohms, 1% THD, RMS	15W
	4 ohms, 1% THD, RMS	25W
	2 ohms, 1% THD, RMS	Not Recommended
Sub Bandpass		40Hz-175Hz
Satellite Bandpass		80Hz-30kHz
Input Sensitivity		85mV
Current Draw		1.2A max
Fuse Rating		250V, 2A, SB
Dimensions (h x w x d)		405mm x 270mm x 345mm
Shipping Dimensions (h x w x d)		500mm x 410mm x 360mm
Shipping Weight		15.7kg



Micro Pack

Shipping Dimensions (h x w x d)	520mm x 590mm x 390mm
Shipping Weight	24.2kg

WMVC

EQ Controls	Bass	100Hz ±10dB
	Treble	10kHz, ±10dB
Maximum Cabling Distance		50m
Dimensions (h x w x d)		115mm x 75mm x 44mm
Shipping Dimensions (h x w x d)		80mm x 130mm x 85mm
Shipping Weight		0.2kg



ENGINEERED AND DISTRIBUTED BY AUDIO TELEX COMMUNICATIONS PTY LTD

ABN 78 001 345 482 Website: www.audiotelex.com.au 1 Clyde Street, Silverwater, Sydney NSW 2128 Australia

For export enquiries email: international@audiotelex.com.au Website: www.australianmonitor.com.au

NSW Phone: (02) 9647 1411 Fax: (02) 9648 3698 VIC Phone: (03) 9890 7477 Fax: (03) 9890 7977 QLD Phone: (07) 3852 1312 Fax: (07) 3252 1237

WA Phone: (08) 9204 0200 Fax: (08) 9244 3783 SA Phone: (08) 8352 4444 Fax: (08) 8352 4488 NZ Phone: (09) 415 9426 Fax: (09) 415 9864